



STYLE



QUALITY



VALUE





style

[stahyl]

noun

an elegant, fashionable, or luxurious mode of living: to live in style.

quality

[kwol-i-tee]

noun

high grade; superiority; excellence: railing of exceptional quality

value

[val-yoo]

noun

relative worth, merit, or importance: the value of a home





Stainless steel

In metallurgy, stainless steel, also known as inox steel or inox from French inoxydable (inoxidizable), is a steel alloy with a minimum of 10.5% chromium content by mass.


tainlesssteel is notable for its corrosion resistance, and it is widely used for food handling and cutlery among many other applications.

Stainless steel does not readily corrode, rust or stain with water as ordinary steel does. However, it is not fully stain-proof in low-oxygen, high-salinity, or poor air-circulation environments.

There are various grades and surface finishes of stainless steel to suit the environment the alloy must endure. Stainless steel is used where both the properties of steel and corrosion resistance are required.

Stainless steel differs from carbon steel by the amount of chromium present. Unprotected carbon steel rusts readily when exposed to air and moisture. This iron oxide film (the rust) is active and accelerates corrosion by making it easier for more iron oxide to form. Since iron oxide has lower density than steel, the film expands and tends to flake and fall away. In comparison, stainless steels contain sufficient chromium to undergo passivation, forming an inert film of chromium oxide on the surface. This layer prevents further corrosion by blocking oxygen diffusion to the steel surface and stops corrosion from spreading into the bulk of the metal.[3] Passivation occurs only if the proportion of chromium is high enough and oxygen is present in it.

Stainless steel's resistance to corrosion and staining, low maintenance, and familiar lustre make it an ideal material for many applications.

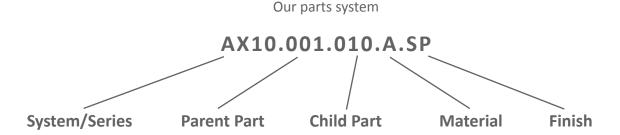



Parts that require adhesive

We offer a complete selection of the highest grade adhesives for professional installation.

Page 69



Parts that require hardware

Our parts are available with a full range of system hardware as well as anchors for mounting to wood and concrete.

Page 68



Installation kits available

Our complete offering of installation kits, tools and accessories makes it easy to professionally install our systems.

Page 70

Index

Post Railing Systems


ROUND SERIES



INFILL OPTIONS



Round Tube Infill 4-7



Cable Infill 8-13



Glass Clamps 14-17

POST OPTIONS



Round Post Options 18-21

HANDRAIL OPTIONS




Round Handrail Options 22-25

SQUARE SERIES



INFILL OPTIONS



Bar/Tube Infill 26-29



Cable Infill 30-35



Glass Clamps 36-39

POST OPTIONS



Square Post Options 42-43



Wood Post Options 42-43

HANDRAIL OPTIONS



Square Handrail Options 42-45



Wood Handrail Options 42-45

Glass Railing Systems


STANDOFF SERIES



STANDOFF OPTIONS




Round Standoffs 46-49



Square Standoffs 50-53

U CHANNEL SERIES



MOUNTING OPTIONS




Floor Mount 54-61



Wall Mount 54-61

CAP RAIL OPTIONS



Round Top rail Options 62-65




Square Top rail Options 66-67



Wood Top rail 66-67

ACCESSORIES



INSTALLATION



Hardware 68



Adhesives 69



Tools & Accessories 70-71




Specialty Tools 72





ROUND SERIES | ROUND TUBE INFILL



Round tube infill



COD.	D	D2	MA
AX10.010.200.A.SP	42.4 mm	12 mm	6.5 mm


Round tube infill holder


Weight:

.053 kgs (.117 lbs)












COD.	В	А
AX10.010.206.A.SP	42.4 mm	12 mm

Round tube infill holder - connector

Weight:


.054 kgs (.118 lbs)










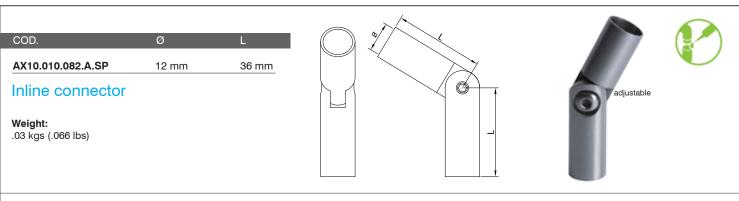








COD.	D2	D3
AX10.010.208.A.SP	12 mm	12 mm

Cross holder

Quick# **825X** Page 68


Weight: .098 kgs (.216 lbs)








COD.	D	L	
AX10.010.081.A.SP	12 mm	15 mm	
End cap			
Weight: .011 kgs (.024 lbs)			














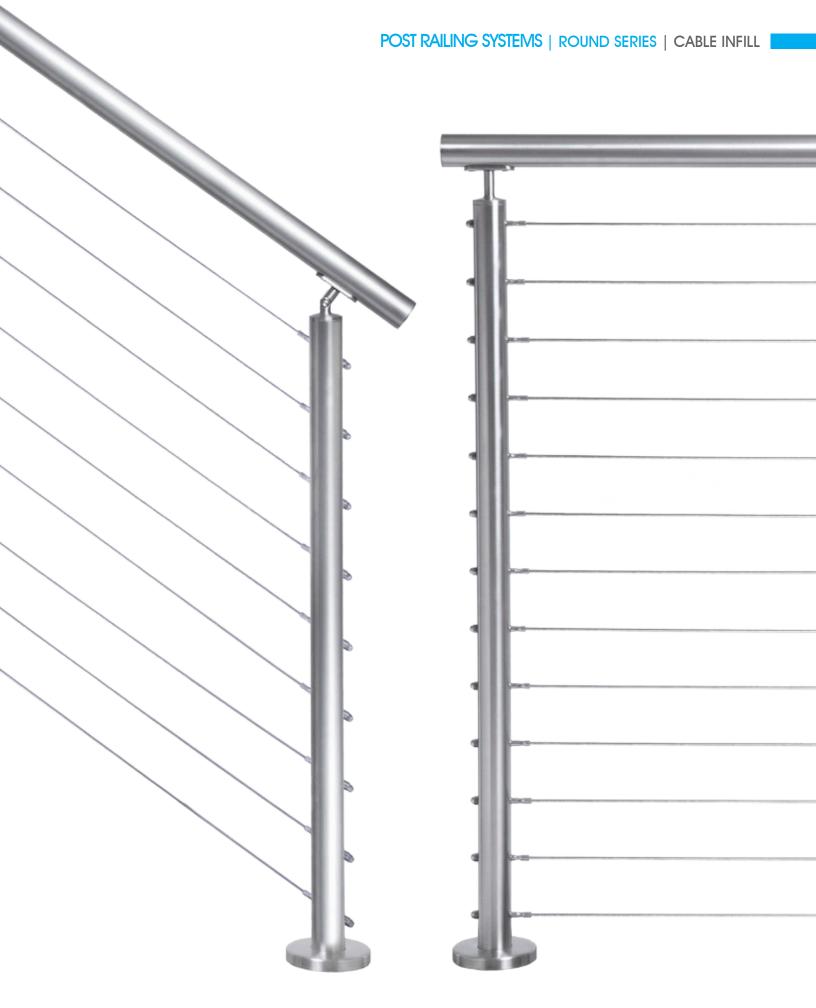





L	Wt.
5'	.15 kgs (.331 lbs)
 10'	.227 kgs (.5 lbs)
15'	.303 kgs (.669 lbs)
20'	.383 kgs (.844 lbs)
25'	.549 kgs (1.2 lbs)
	15' 20'

Outside to outside Level/balcony or angle/rake Steel posts



Drill Kit **AX00.070.640** Page 70





COD.	L	Wt.
HFC18.102-5	5'	.15 kgs (.331 lbs)
HFC18.102-10	10'	.227 kgs (.5 lbs)
HFC18.102-15	15'	.303 kgs (.669 lbs)
HFC18.102-20	20'	.383 kgs (.844 lbs)
HFC18.102-25	25'	.549 kgs (1.2 lbs)

Outside to outside Level/balcony or angle/rake Steel or wood posts



Drill Kit **AX00.070.630**Page 70





L	Wt.
5'	.15 kgs (.331 lbs)
10'	.227 kgs (.5 lbs)
15'	.303 kgs (.669 lbs)
20'	.383 kgs (.844 lbs)
25'	.549 kgs (1.2 lbs)
	10' 15' 20'

Inside to inside Level/balcony



Drill Kit **AX00.070.645** Page 70





L	Wt.
Ε,	15 kgg / 001 lbg)
	.15 kgs (.331 lbs)
10'	.227 kgs (.5 lbs)
15'	.303 kgs (.669 lbs)
20'	.383 kgs (.844 lbs)
25'	.549 kgs (1.2 lbs)
	20'

Inside to inside Level/balcony or angle/rake



Drill Kit **AX00.070.650**Page 70






1 x 19 Cable - 1/8" Diameter










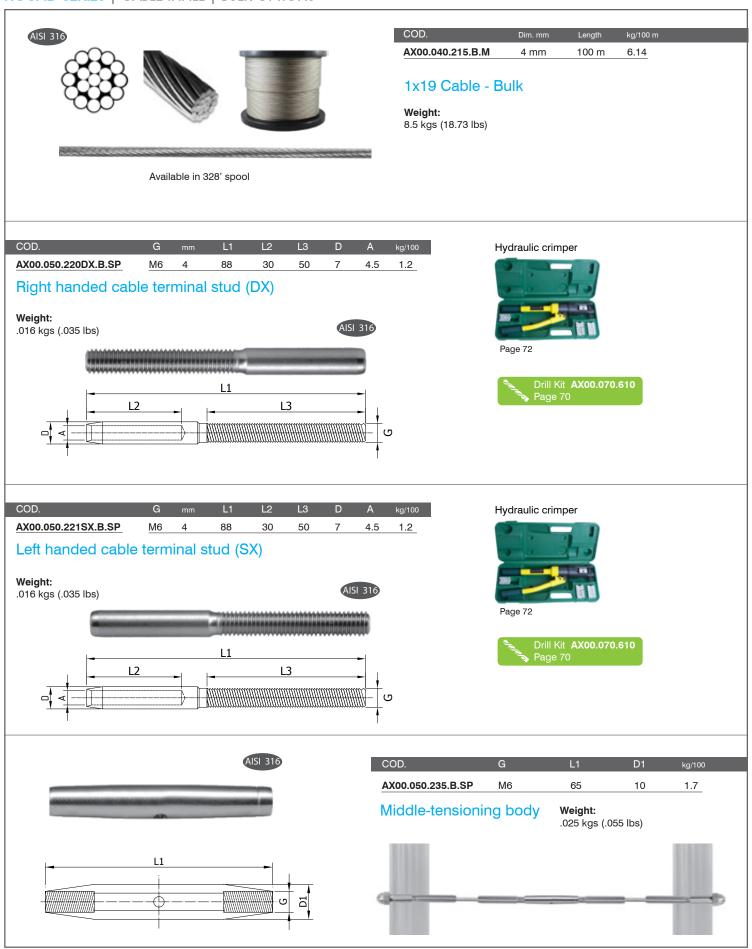





Threaded nut caps tensioner

Weight: .006 kgs (.013 lbs)







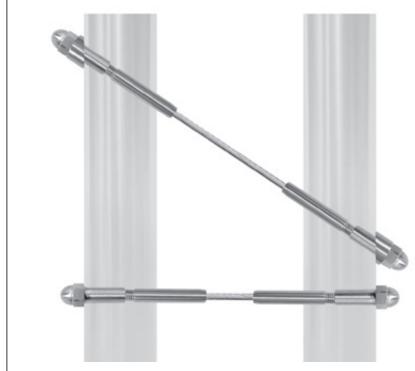






ROUND SERIES | GLASS CLAMPS














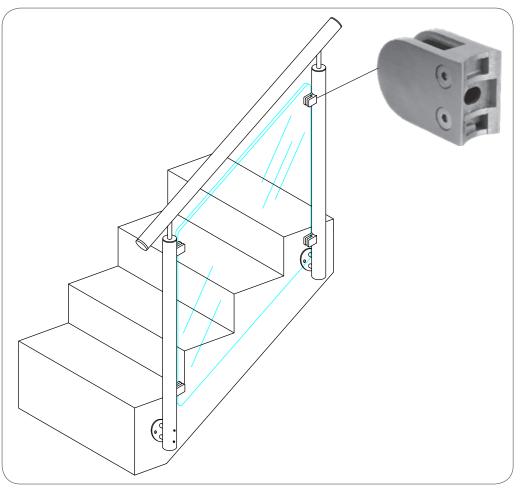



COD. Ø L **AX10.014.180.A.SP** 42.4 mm 10 - 12.76 mm


Glass clamps for round posts


Weight:


.303 kgs (.667 lbs)

Rubber inserts not included Available for 3/8" & 1/2" monolithic glass











Swift plate and safety pin included


COD.	Т


AX10.015.182R 10 mm for 3/8" glass AX10.015.183R 12 mm for 1/2" glass

Glass clamp inserts

Weight:

.009 kgs (.02 lbs)









Size
M6
M8

Pop rivets - threaded inserts

Weight:

.003 kgs (.007 lbs) .005 kgs (.011 lbs)

Provides stronger connection of glass clamps to posts than standard tap/screw






AXIA

STAIR & RAILING SYSTEMS









AX20.001.002.A.SP

42.4 mm

Wall mount

Weight: .394 kgs (.869 lbs)









AX10.007.120.A.SP

AX10.007.121.A.SP

Note: End caps should be used on the bottom of the posts.





See page 22





ROUND SERIES | POSTS | SUPPORTS | SADDLES



COD.

D


AX10.005.022.A.SP


42.4 mm

45 degree saddle

Weight:


.047 kgs (.103 lbs)













COD.

AX10.005.023.A.SP


42.4 mm

D


90 degree saddle

Weight: .036 kgs (.079 lbs)












AX10.005.024.A.SP


42.4 mm

Saddle - 180 degree - round

.037 kgs (.081 lbs)
















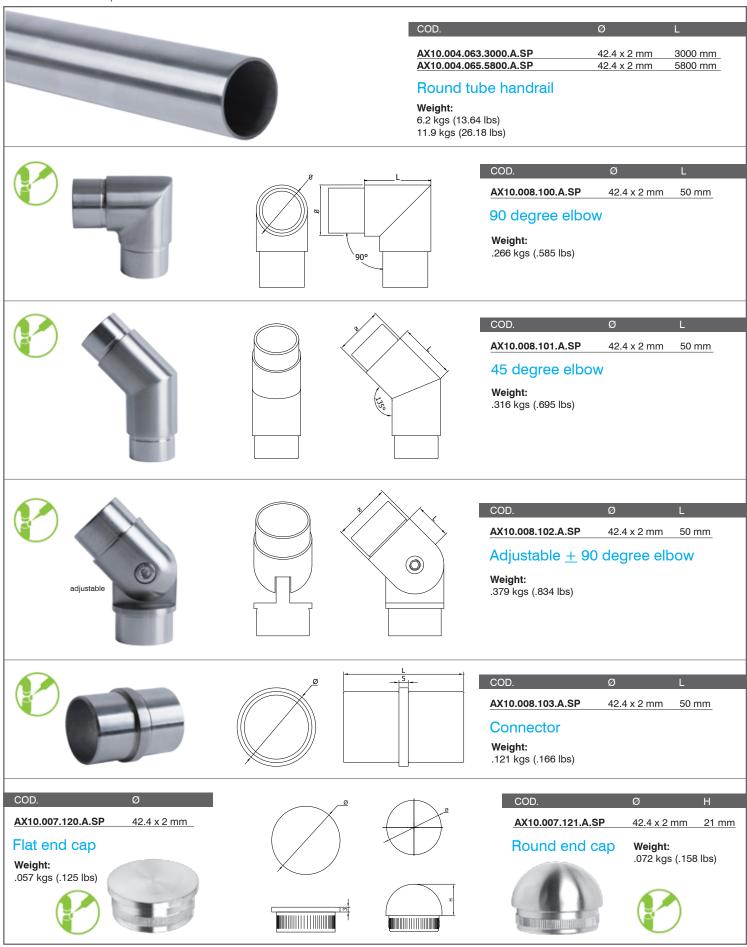

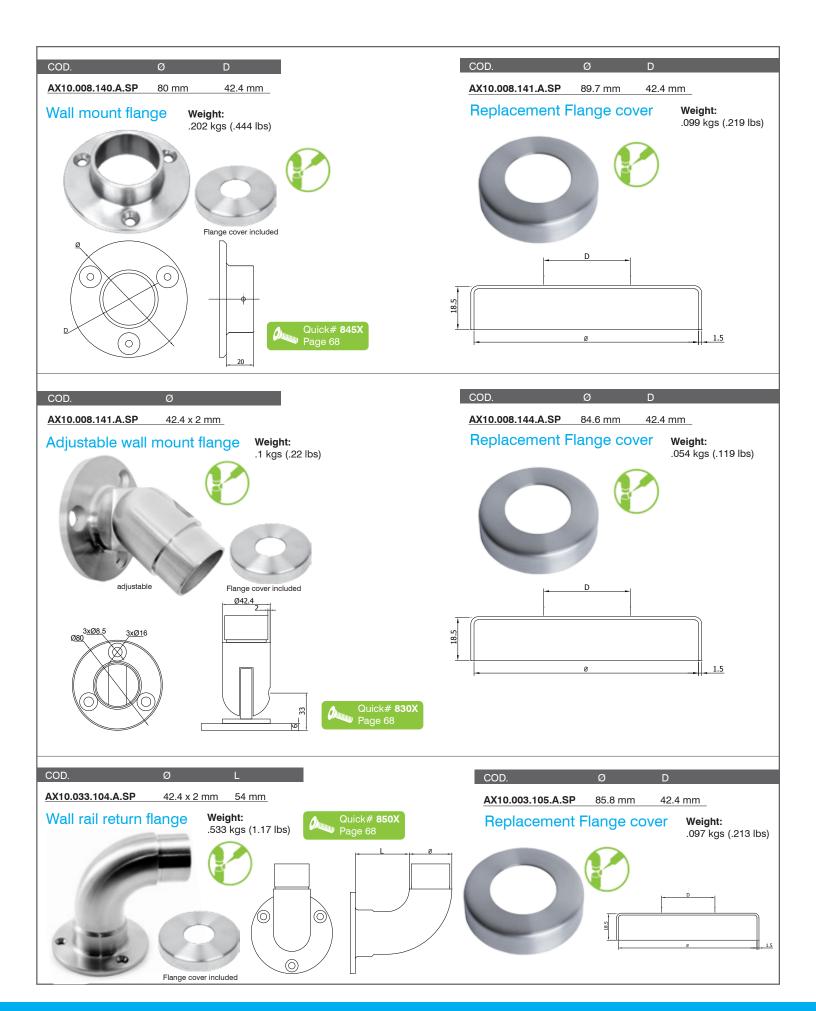






COD.	Ø	R	Ød
AX10.033.023.A.SP	70 mm	12 mm	42.4 mm


Wall handrail support


Flat saddle sold separately for flat rail options

Weight: .275 kgs (.605 lbs)




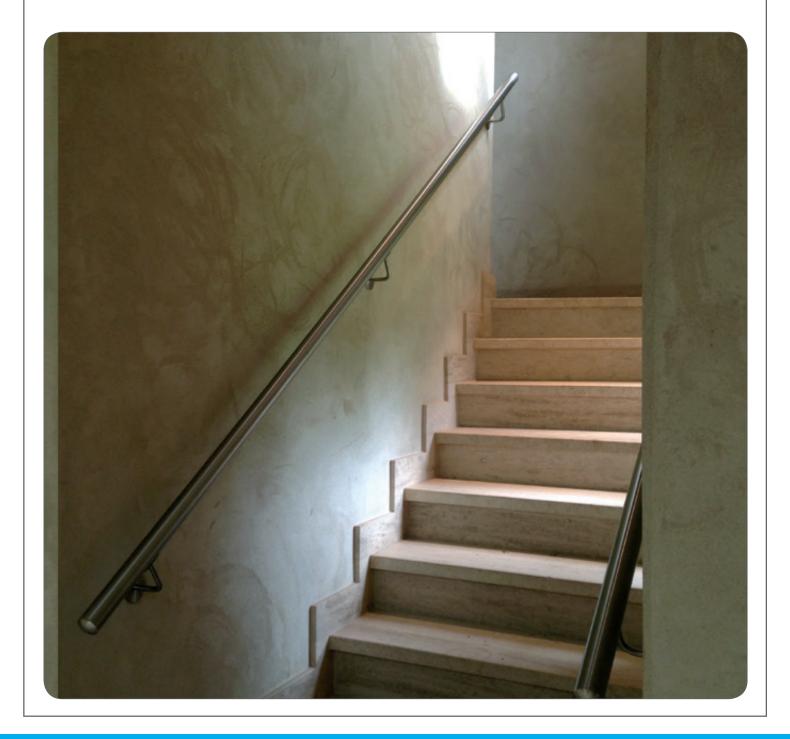


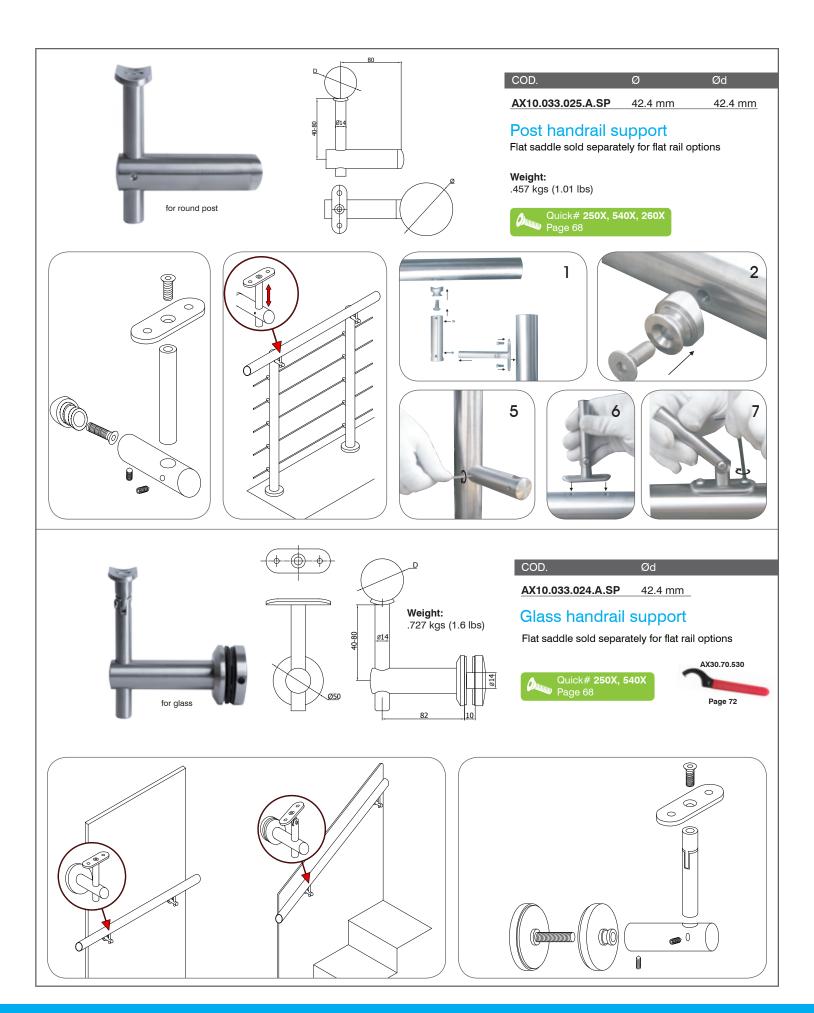

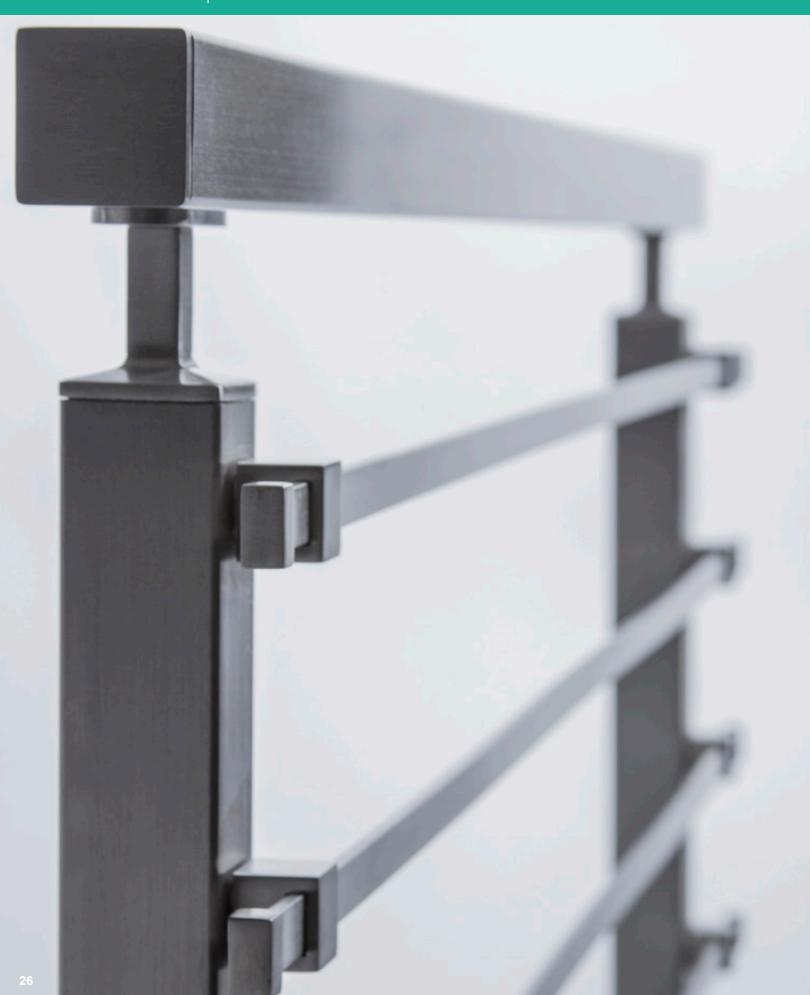




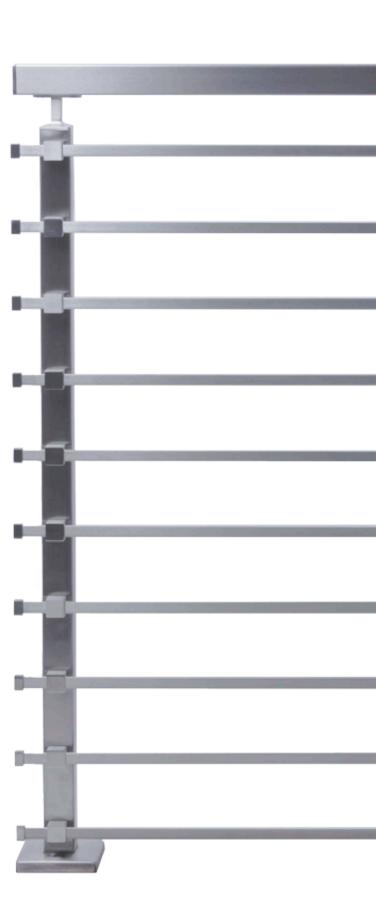

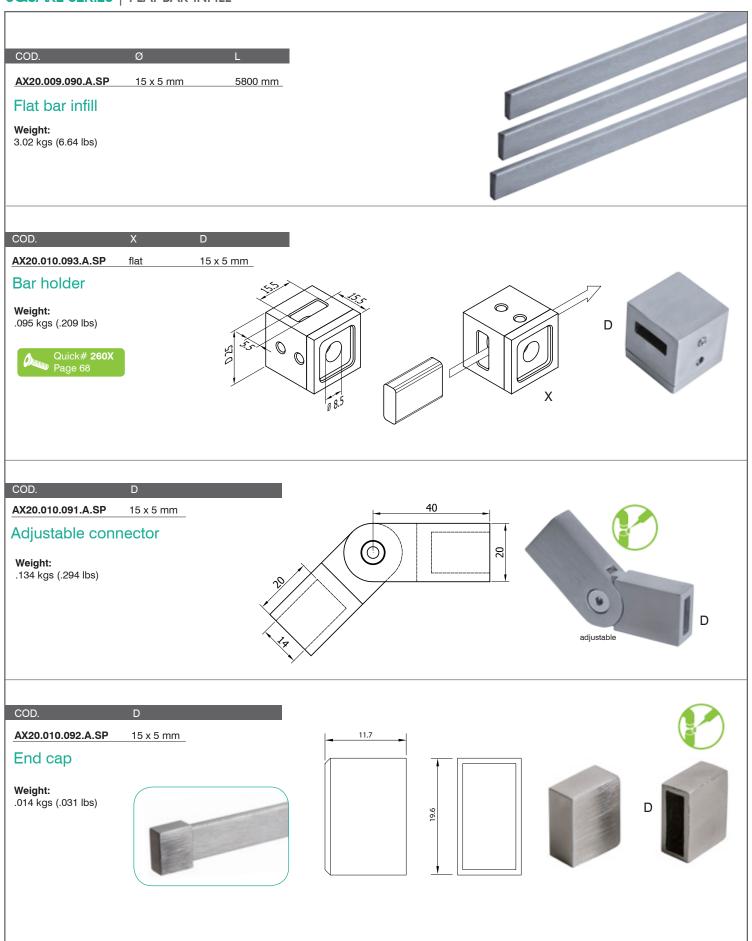

SQUARE SERIES | ROUND TUBE INFILL

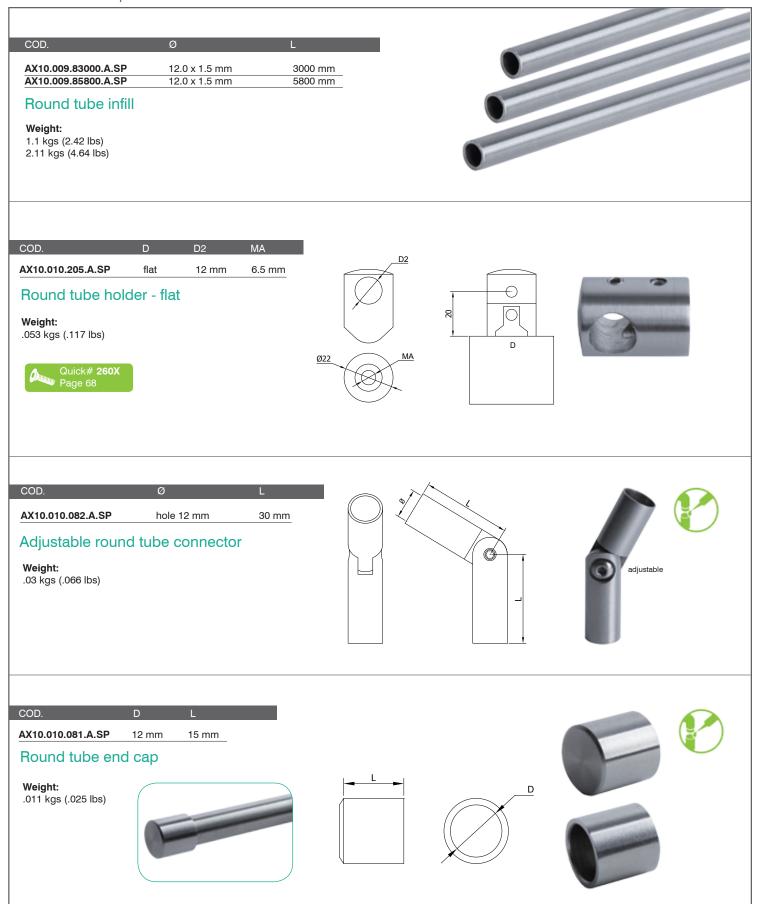









COD.	L	Wt.
HFC18.212-5	5'	.15 kgs (.331 lbs)
HFC18.212-10	10'	.227 kgs (.5 lbs)
HFC18.212-15	15'	.303 kgs (.669 lbs)
HFC18.212-20	20'	.383 kgs (.844 lbs)
HFC18.212-25	25'	.549 kgs (1.2 lbs)

Outside to outside Level/balcony or angle/rake Steel posts



Drill Kit **AX00.070.640** Page 70





COD.	L	Wt.
HFC18.102-5	5'	.15 kgs (.331 lbs)
HFC18.102-10	10'	.227 kgs (.5 lbs)
HFC18.102-15	15'	.303 kgs (.669 lbs)
HFC18.102-20	20'	.383 kgs (.844 lbs)
HFC18.102-25	25'	.549 kgs (1.2 lbs)

Outside to outside Level/balcony or angle/rake Steel or wood posts



Drill Kit **AX00.070.630** Page 70





COD.	L	Wt.
HFC18.401-5	5'	.15 kgs (.331 lbs)
HFC18.401-10	10'	.227 kgs (.5 lbs)
HFC18.401-15	15'	.303 kgs (.669 lbs)
HFC18.401-20	20'	.383 kgs (.844 lbs)
HFC18.401-25	25'	.549 kgs (1.2 lbs)

Inside to inside Level/balcony



Drill Kit **AX00.070.645** Page 70





COD.	L	Wt.
HFC18.500M-5	5'	.15 kgs (.331 lbs)
HFC18.500M-10	10'	.227 kgs (.5 lbs)
HFC18.500M-15	15'	.303 kgs (.669 lbs)
HFC18.500M-20	20'	.383 kgs (.844 lbs)
HFC18.500M-25	25'	.549 kgs (1.2 lbs)

Inside to inside Level/balcony or angle/rake







1 x 19 Cable - 1/8" Diameter

SQUARE SERIES | CABLE INFILL KITS FOR WOOD POSTS - PRE SWAGED





COD.	L	Wt.
HFC18.262T-S-5	5'	.15 kgs (.331 lbs)
HFC18.262T-S-10	10'	.227 kgs (.5 lbs)
HFC18.262T-S-15	15'	.303 kgs (.669 lbs)
HFC18.262T-S-20	20'	.383 kgs (.844 lbs)
HFC18.262T-S-25	25'	.549 kgs (1.2 lbs)

Outside to outside Level/balcony








COD.	L	Wt.
HFC18.262T-A-5	5'	.15 kgs (.331 lbs)
HFC18.262T-A-10	10'	.227 kgs (.5 lbs)
HFC18.262T-A-15	15'	.303 kgs (.669 lbs)
HFC18.262T-A-20	20'	.383 kgs (.844 lbs)
HFC18.262T-A-25	25'	.549 kgs (1.2 lbs)

Outside to outside Angle/rake







COD.	L	Wt.
HFC18.601T-A-5	5'	.15 kgs (.331 lbs)
HFC18.601T-A-10	10'	.227 kgs (.5 lbs)
HFC18.601T-A-15	15'	.303 kgs (.669 lbs)
HFC18.601T-A-20	20'	.383 kgs (.844 lbs)
HFC18.601T-A-25	25'	.549 kgs (1.2 lbs)

Outside to inside Level/balcony







COD.	L	Wt.
HFC18.300-5	5'	.15 kgs (.331 lbs)
HFC18.300-10	10'	.227 kgs (.5 lbs)
HFC18.300-15	15'	.303 kgs (.669 lbs)
HFC18.300-20	20'	.383 kgs (.844 lbs)
HFC18.300-25	25'	.549 kgs (1.2 lbs)

Inside to inside Level/balcony









COD.	L	Wt.
HFC18.500-5	5'	.15 kgs (.331 lbs)
HFC18.500-10	10'	.227 kgs (.5 lbs)
HFC18.500-15	15'	.303 kgs (.669 lbs)
HFC18.500-20	20'	.383 kgs (.844 lbs)
HFC18.500-25	25'	.549 kgs (1.2 lbs)

Inside to inside Angle/rake





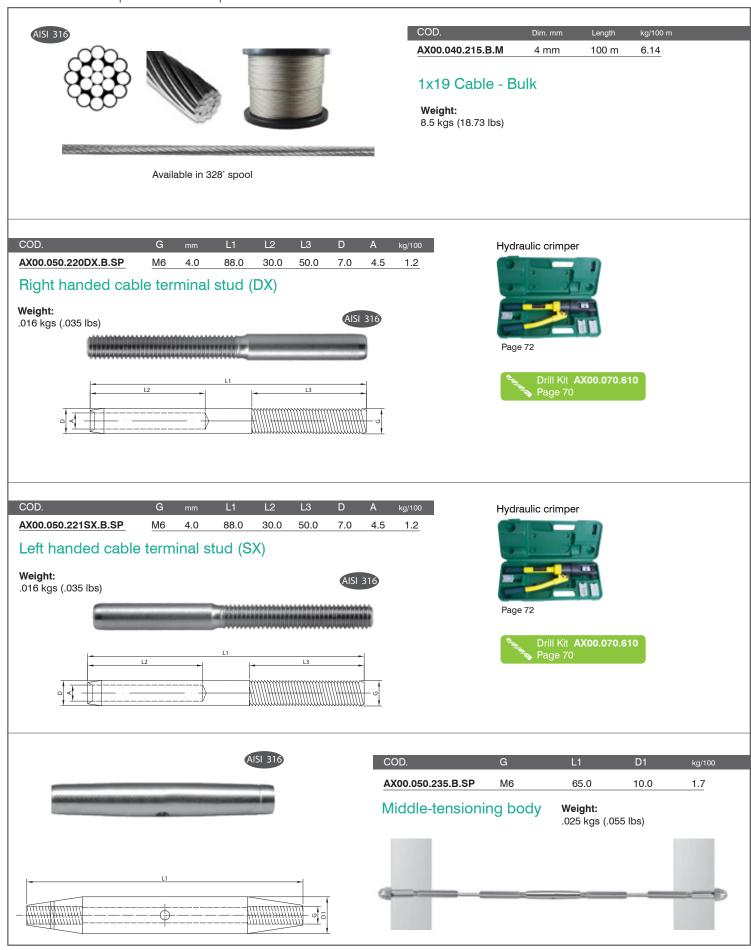




Threaded nut cap tensioners

Weight: .006 kgs (.013 lbs)













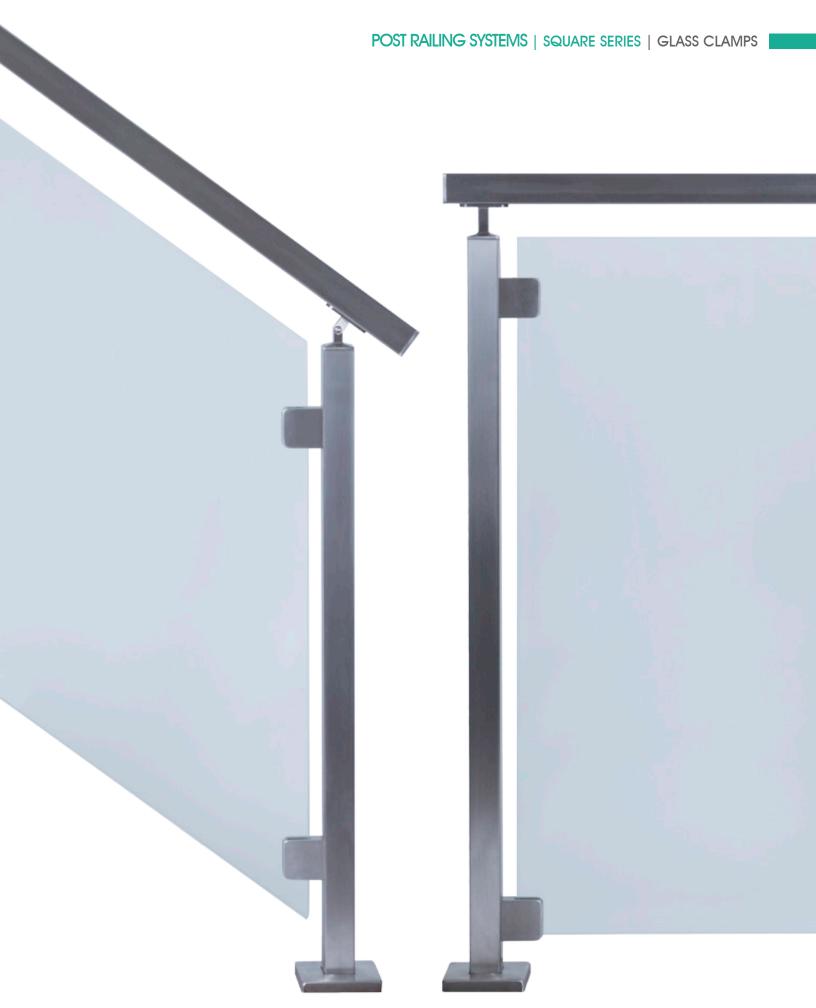





55

35





D

Weight:

.328 kgs (.727 lbs)

COD.

Rubber inserts not included Available for 3/8" & 1/2" monolithic glass







Glass clamp inserts

T - indicates glass thickness

Weight:

.009 kgs (.02 lbs)




COD.	Size
AX00.090.267.A.SP AX00.090.269.A.SP	M6 M8
Pop rivets - threa	ded
Provides stronger connection clamps to posts than star	•
Weight: .003 kgs (.007 lbs) .005 kgs (.011 lbs)	
	Pop rivet tool
Quick# 255X , 260 Page 68	x -


Page 72









SQUARE SERIES | POST OPTIONS

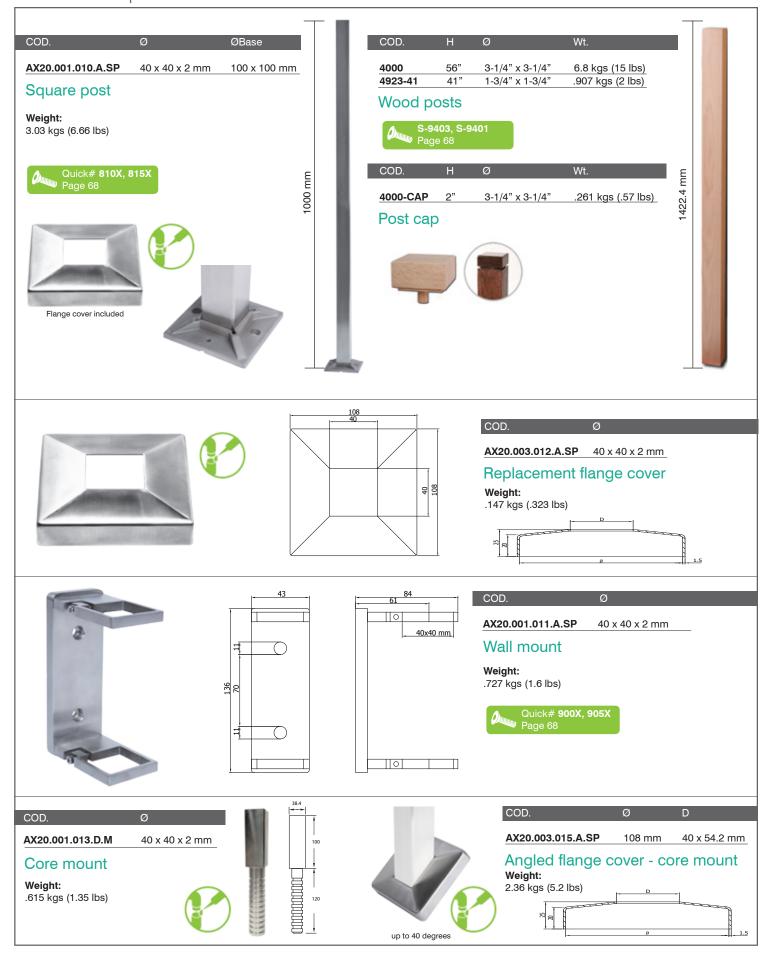

SQUARE SERIES | SUPPORTS | SADDLES

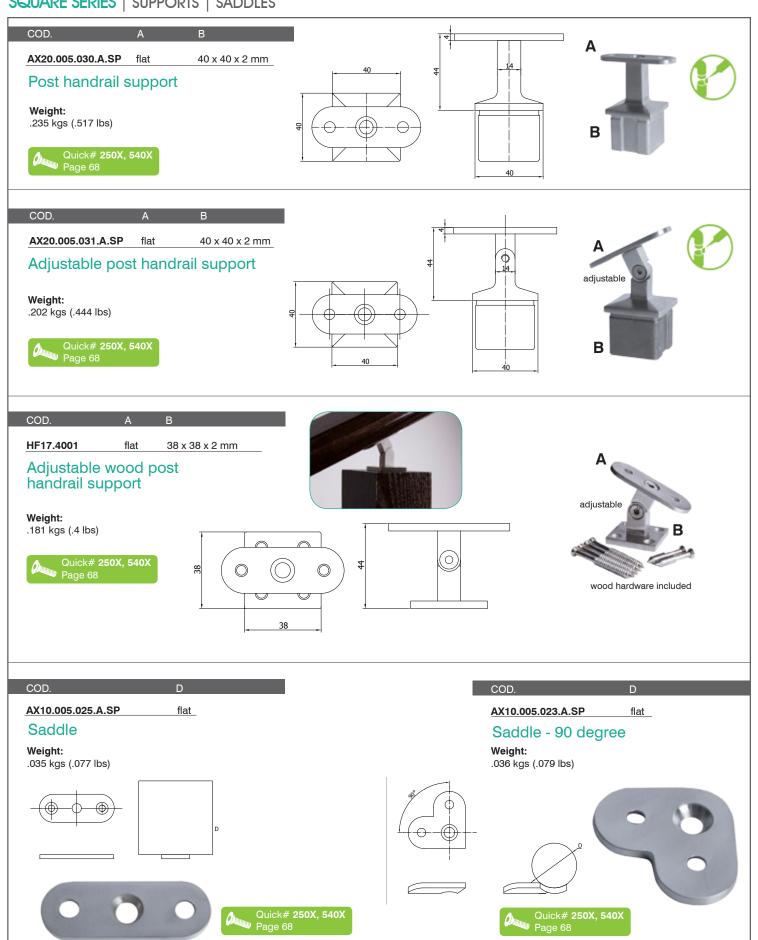

SQUARE SERIES | HANDRAIL | OPTIONS



Square Tube Handrail





COD. Ø	L	Wt.
6084 2-5/8" >	< 1-5/8" 16'	10.89 kgs (24 lbs)
6084 2-5/8" >	<u> </u>	5.44 kgs (12 lbs)
6002 2-3/4" >	(1-5/8" 16'	10.89 kgs (24 lbs)
6002 2-3/4" >	< 1-5/8" 8'	5.44 kgs (12 lbs)
6060 2" x 1-1	/16" 16'	3.63 kgs (8 lbs)
6060 2" x 1-1	/16" 8'	1.81 kgs (4 lbs)


Wood Handrail - Red Oak

Additional species available by special order



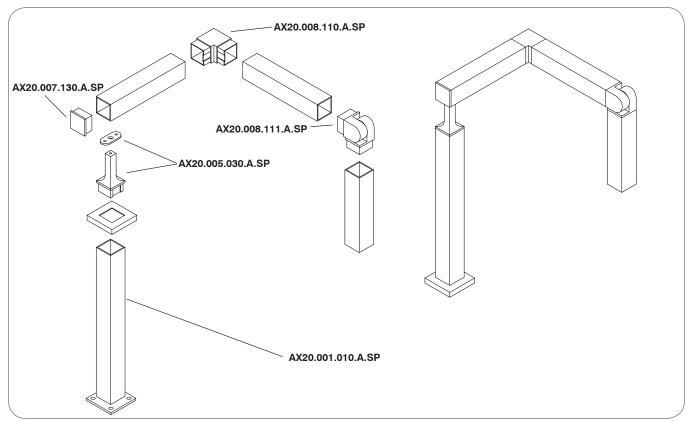

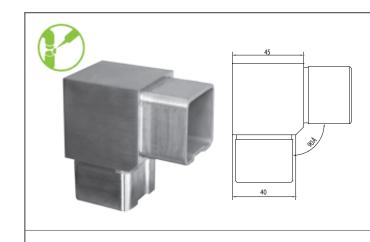




COD.


AX20.008.110.A.SP 40 x 40 x 2 mm

90 Degree elbow

Weight: .037 kgs (.184 lbs)







AX20.008.111.A.SP

40 x 40 x 2 mm


Adjustable + 90 degree elbow


Weight:

COD.

.546 kgs (1.2 lbs)







COD.


AX20.007.130.A.SP 40 x 40 x 2 mm

End cap

Weight:

.1 kgs (.22 lbs)





COD.


AX20.008.112.A.SP 40 x 40 x 2 mm

Connector


Weight:

.155 kgs (.341 lbs)

SQUARE SERIES | HANDRAIL | OPTIONS

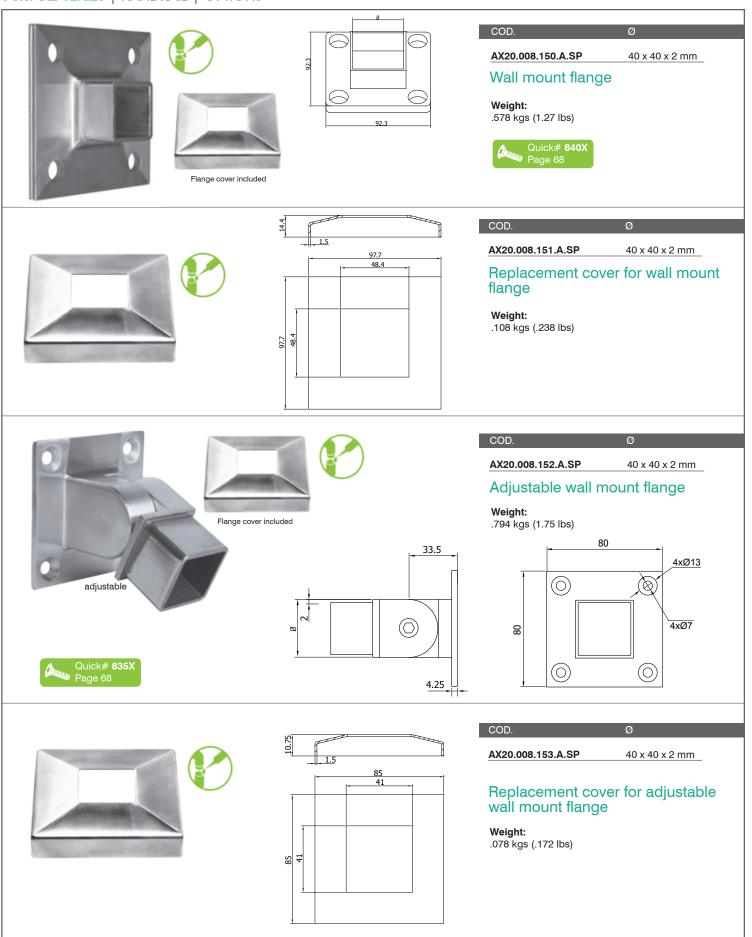


SQUARE SERIES | HANDRAIL | SUPPORTS

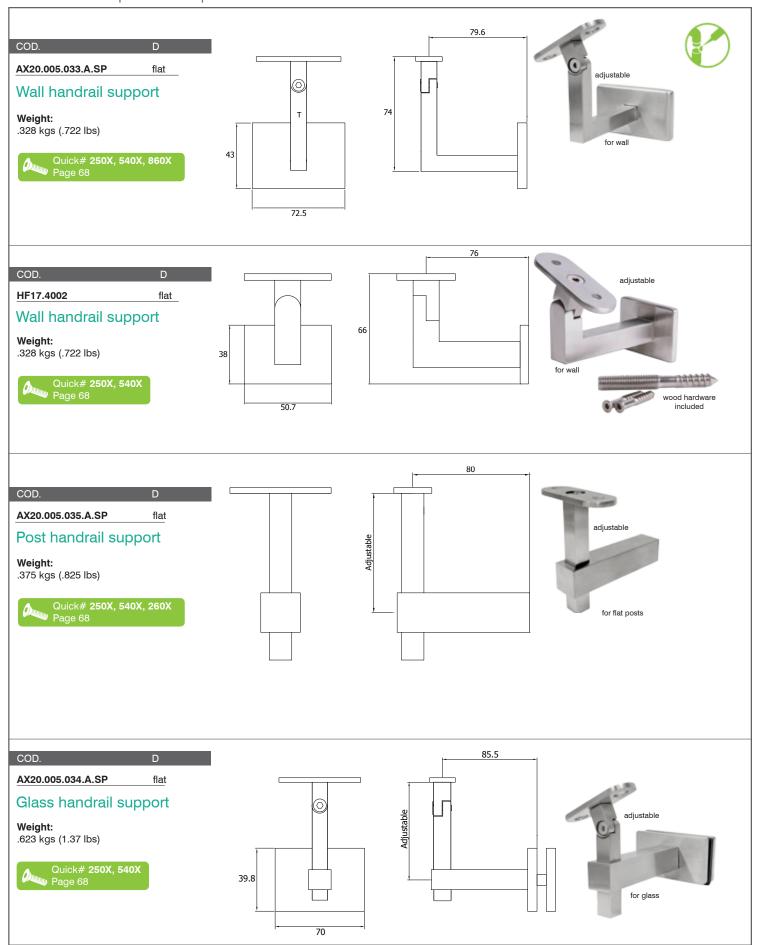







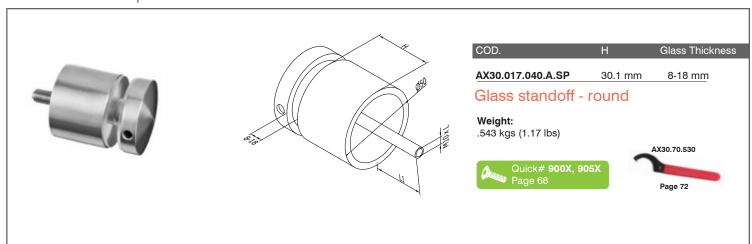



COD. Thickness

AX30.017.042.F 1.25 mm

Glass leveling shim - round

Weight:
.011 kgs (.024 lbs)












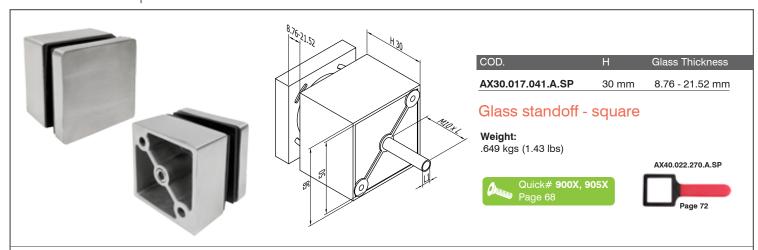



AX30.017.043.F 1.25 mm

Glass leveling shim - square

Weight:
.013 kgs (.029 lbs)












U Channel Series | Mounting Options

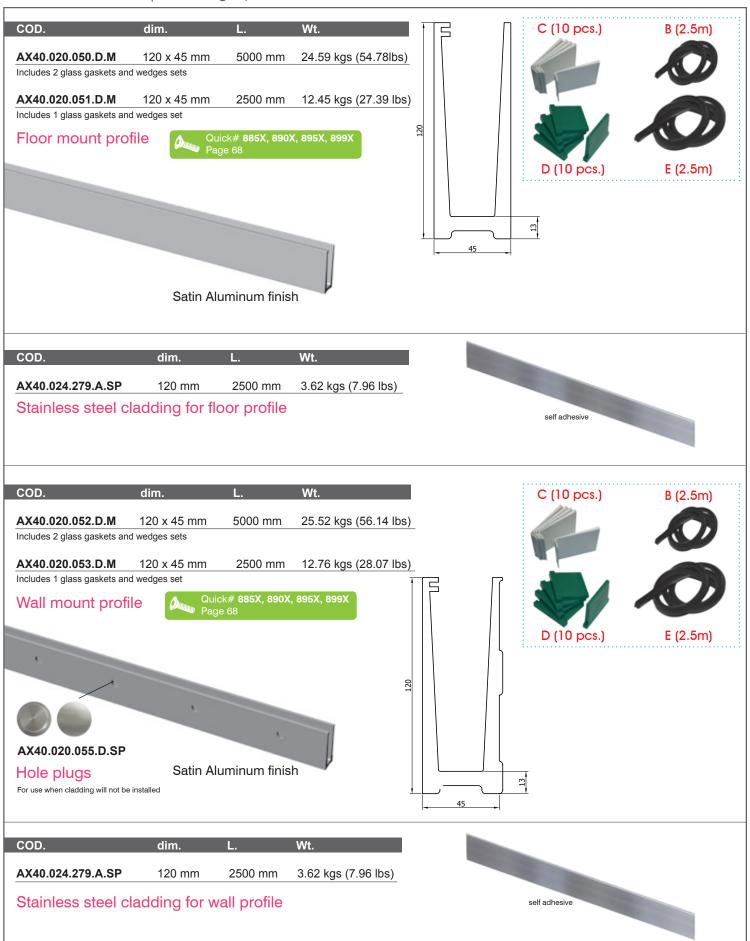

COD.


AX40.021.285.R


Wedge kit

Wedge kits are included with U Channel This part is sold separately to provide additional shims

Weight:


1.41 kgs (3.11 lbs)





Floor profile





 COD.
 dim.
 L.


 AX40.023.272.D.M
 120 x 45 mm
 250 mm

 Inside corner for floor profile
 weight:
 1.75 kgs (3.85 lbs)

 COD.
 dim.
 L.


 AX40.023.274.D.M
 120 x 45 mm
 250 mm

Outside corner for floor profile Weight: 1.75 kgs (3.85 lbs)



Wall profile

Quick# **875X**, **880X**Page 68



AX40.023.276.D.M 120 x 45 mm 250 mm

Inside corner for wall profile


COD.


Weight: 1.79 kgs (3.95 lbs) **AX40.023.278.D.M** 120 x 45 mm

250 mm

Outside corner for wall profile


Weight: 1.79 kgs (3.95 lbs)

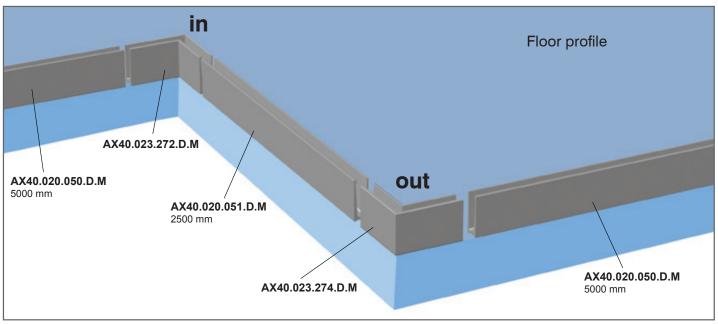


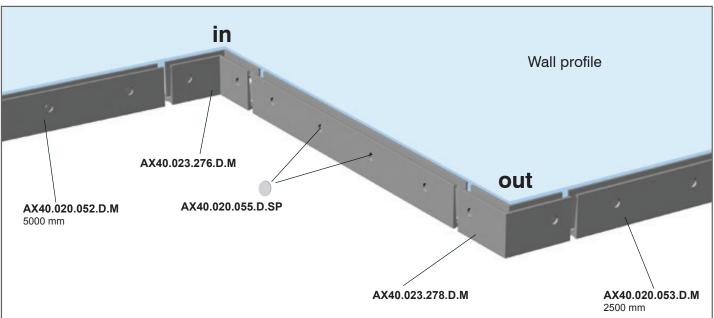





















U Channel Series | End caps

COD.

AX40.020.281.D.SP

End cap - Floor profile - Level/balcony

Weight:

.02 kgs (.044 lbs)



Satin Finish Aluminium

COD.

AX40.020.283.D.SP

End cap - Floor profile - Angle/rake

up to 40 degrees

Weight:

.026 kgs (.057 lbs)



Satin Finish Aluminium

COD.

AX40.020.282.D.SP

End cap - Wall profile - Level/balcony

Weight:

.021 kgs (.046 lbs)



Satin Finish Aluminium

COD.

AX40.020.284.D.SP

End cap - Wall profile - Angle/rake

up to 40 degrees

Weight:

.027 kgs (.059 lbs)



Satin Finish Aluminium

COD.


AX40.022.270.A.SP

Drainage spacer

Weight:

.040 kgs (.087 lbs)




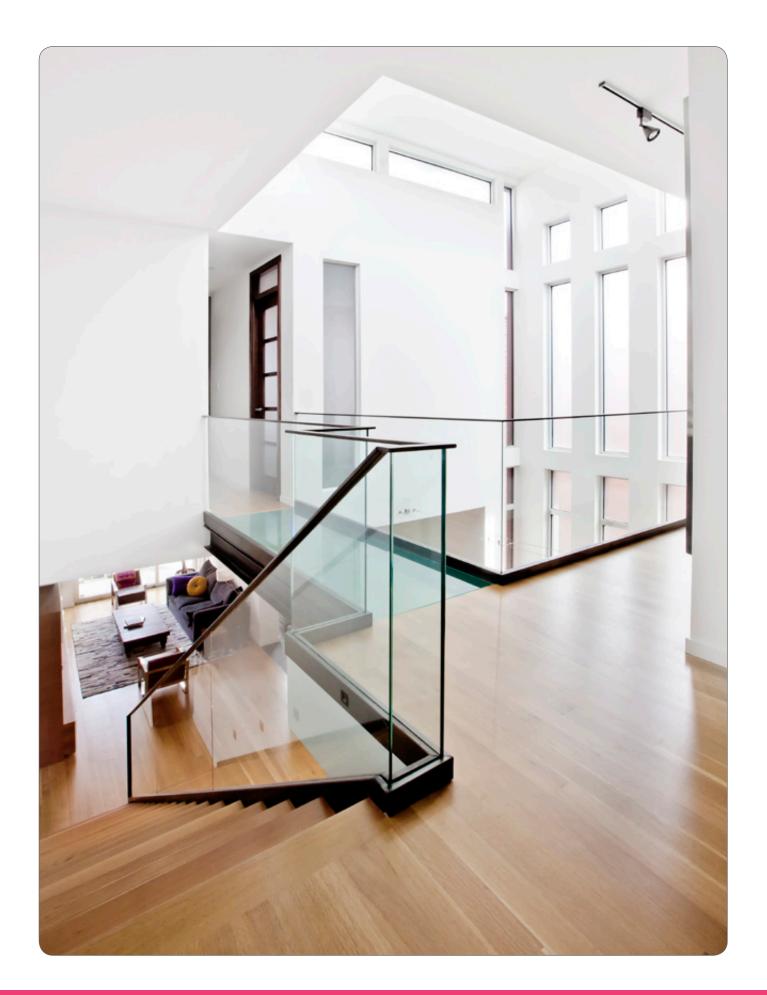






Glass Railing Systems | Round Cap Rail Options

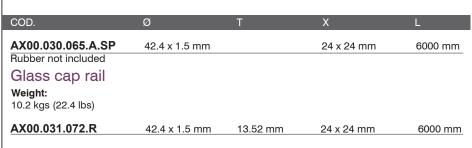


Rubber washer

Weight:

2.34 kgs (5.15 lbs)

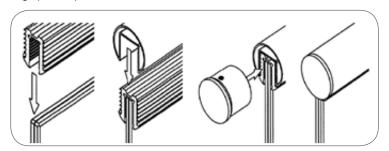



COD. Ø

AX00.032.175.A.SP 42.4 x 1.5 mm

Wall mount flange

Weight:


.2 kgs (.44lbs)




Fits up to 1/2" glass



Flange cover included





COD. Ø


AX00.032.176.A.SP 42.4 x 1.5 mm

Replacement wall mount flange cover

Weight:

.1 kgs (.219 lbs)





COD.

AX00.030.120.A.SP

42.4 x 1.5 mm



Weight:

.084 kgs (.184 lbs)








COD.

Ø


AX00.032.171.A.SP

42.4 x 1.5 mm



Weight:

.332 kgs (.73 lbs)







COD.


Ø

AX00.032.170.A.SP

42.4 x 1.5 mm

Horizontal elbow

Weight: .297 kgs (.653 lbs)








COD.

AX00.032.174.A.SP

42.4 x 1.5 mm







Connector

Weight:

.104 kgs (.289 lbs)







COD.


AX00.032.172.A.SP

42.4 x 1.5 mm

Adjustable elbow - upward

Weight:

.3 kgs (.66 lbs)





COD.


AX00.032.173.A.SP

42.4 x 1.5 mm

Adjustable elbow - downward

Weight:

.321 kgs (.706 lbs)





Glass Railing Systems | Square Cap Rail Options

COD. Ø T X L

AX00.030.071.A.SP 42.4 x 1.5 mm 24 x 24 mm 5000 mm

Rubber not included
Square cap rail


Weight:
12.4 kgs (27.28 lbs)

AX00.031.072.R 42.4 x 1.5 mm 13.52 mm 24 x 24 mm 6000 mm

Rubber washer






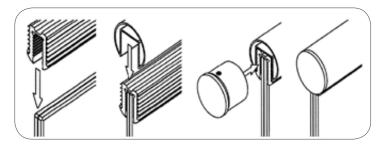



COD.	Ø	T	Χ	L	Wt.	
AX00.030.073.G.RW	1.57" x 1.57"		24 x 24 mm	16 '	5.81 kgs (12.8 lbs)	
AX00.030.074.G.RW	1.57" x 1.57"		24 x 24 mm	8'	2.9 kgs (6.4 lbs)	
Red Oak wood o	cap rail					
AX00.030.080.G.RW	1.57" x 1.57"		24 x 24 mm	16 '	5.81 kgs (12.8 lbs)	
AX00.030.084.G.RW	1.57" x 1.57"		24 x 24 mm	8'	2.9 kgs (6.4 lbs)	
White Oak wood cap rail Rubber not included						
AX00.031.072.R	42.4 x 1.5 mm	13.52 mm	24 x 24 mm	6000 mr	n 2.34 kgs (5.15 lbs)	
Rubber washer						




Additional species available by special order

COD. Ø AX00.032.324.A.SP 42.4 x 1.5 mm Wall mount flange

Weight: .211 kgs (.464 lbs)
























Flat end cap

AX00.032.322.A.SP

Weight:

COD.

.114 kgs (.251 lbs)

COD.

Ø


AX00.032.326.A.SP

42.4 x 1.5 mm

Vertical elbow

Weight:

.428 kgs (.942 lbs)







COD.

Ø


AX00.032.305.A.SP

42.4 x 1.5 mm

Horizontal elbow

Weight:

.367 kgs (.807 lbs)





COD.


AX00.032.320.A.SP

42.4 x 1.5 mm

Connector

Weight:

.176 kgs (.387 lbs)







COD.


AX00.032.310.A.SP

42.4 x 1.5 mm

Adjustable elbow - upward

Weight:

.411 kgs (.904 lbs)







COD.


AX00.032.311.A.SP

42.4 x 1.5 mm

Adjustable elbow - downward

Weight:

.436 kgs (.962 lbs)







COD.


AX00.032.315.A.SP

42.4 x 1.5 mm

Adjustable horizontal elbow

Weight:

.365 kgs (.803 lbs)







System Hardware	Doolsons
Quick# Part# Dimensions/Unit Quantity Function	Package Quantity
250X AX00.090.250.A.SP M5 x 12 mm (QTY 2) Attaches saddle to metal handrail	25
540X AX00.090.540.A.SP 4.8 x 25 mm (QTY 2) Attaches saddle to wood handrail	25
265X AX00.090.265.A.SP M6 x 10 mm (QTY 1) Attaches saddle to stem (Replace	nent) 25
260X AX00.090.260.A.SP M6 x 20 mm (QTY 1) Attaches bar holder to metal post	25
255X AX00.090.255.A.SP M8 x 25 mm (QTY1) Attaches glass clamp to metal pos	t 25
Anchors	
Quick# Part# Dimensions/Unit Quantity Function	Package Quantity
800X AX00.090.800.A.SP 3/8 X 3 1/2" Wood lag bolts (QTY 3) Round newel post mount	3_
805X AX00.090.805.A.SP 3/8 X 3 1/2" Concrete wedge anchors (QTY 3) Round newel post mount	3_
810X AX00.090.810.A.SP 3/8 x 3 1/2" Lag bolts to wood floor (QTY 2) Square newel post mount	2
815X AX00.090.815.A.SP 3/8 x 3 1/2" Concrete wedge anchors (QTY 2) Square newel post mount	2
820X AX00.090.820.A.SP #10 x 3" Wood screw to attach to wall (QTY 4) Square cap rail wall mount flange	4
825X AX00.090.825.A.SP #10 x 3" Wood screw to attach to wall (QTY 3) Round cap rail wall mount flange	3
830X AX00.090.830.A.SP #14 x 3" Wood screw to attach to wall (QTY 3) Round adjustable angle wall rail fit	ing 3
835X AX00.090.835.A.SP #14 X 3" Flat head wood screw (QTY 4) Square adjustable angle wall rail fit	ting 4
840X AX00.090.840.A.SP #14 X 3" Wood screw to attach to wall (QTY 4) Square wall mount flange	4_
845X AX00.090.845.A.SP #10 X 3" Wood screw to attach to wall (QTY 3) Round wall mount flange	3
850X AX00.090.850.A.SP #14 X 3" Flat head wood screw (QTY 3) Round wall Rail return	3_
855X AX00.090.855.A.SP #12 X 3" Flat head wood screw (QTY 3) Round wall Rail Bracket	3_
860X AX00.090.860.A.SP #12 X 3" Flat head wood screw (QTY 2) Square wall Rail Bracket	2
865X AX00.090.865.A.SP M6 x 76 Socket head wood screw (QTY 2) Square side mount post bracket	2
870X AX00.090.870.A.SP #16 X 3" Flat head wood screw (QTY 4) Round side mount post bracket	4_
875X AX00.090.875.A.SP 1/2 x 3 1/2 Flat head wood screw (QTY 2) U Channel 90 degree corners	2
880X AX00.090.880.A.SP 3/8 x 3 1/2 Flat slotted concrete sleeve anchor (QTY 2) U Channel 90 degree corners	2
885X AX00.090.885.A.SP 3/8 x 3 1/2 Flat head wood screw (QTY 10) U Channel floor and wall mount (2	500mm) 10
890X AX00.090.890.A.SP 3/8 x 3 1/2 Flat slotted concrete sleeve anchor (QTY 10) U Channel floor and wall mount (2	500mm) 10
895X AX00.090.895.A.SP 3/8 x 3 1/2 Flat head wood Screw (QTY 20) U Channel floor and wall mount (5	000mm) 10
899X AX00.090.899.A.SP 3/8 x 3 1/2 Flat slotted concrete sleeve anchor (QTY 20) U Channel floor and wall mount (5	000mm) 10
900X AX00.090.900.A.SP M6 x 80 Wood screw with socket head (QTY 2) Standoffs / side mount post bracket	ets 2
905X AX00.090.905.A.SP M6 x 80 Machine screw with socket head (QTY 2) Standoffs / side mount post bracket	ets 2

COD

AX00.100.525

PERMABOND MH052 is ideal for the sealing of threaded joints. It is approved for use with gas for working pressure up to 26 bar and also for gaseous oxygen up to 10 bar and 60°C. MH052 seals against gas, water, LPG, hydrocarbons, oils and other chemicals. Unlike PTFE tape or hemp, Permabond MH052 will not shred or dry out, so it will provide a durable seal, helping to extend the life of the components. 75 ml

Thread Lock

Weight: .18 kgs (.4 lbs)





COD

AX00.100.563

PERMABOND HM162 is a medium viscosity retaining compound that cures when confined between metal parts to form an extremely tough bond. It is best suited for cylindrical parts and where high temperature resistance is required. In the uncured, liquid state, the adhesive wets the metal surfaces, keying into all surface irregularities and fills the space between the mated parts. 10 ml

Sealant

Weight: 136 kgs (.3 lbs)

COD

EPC-410

Epoxy Adhesive, Rapid Cure, High Strength Paste, Translucent, 50mL, Cartridge, Mixing Ratio 1:1, Application Time 7 min., Functional Cure 4 Hrs, Full Cure 4 hr, Work Life 15 min., Substrates Metal, Wood, Brick, Stone, Marble, Rubber, Some Plastics, And More, Repairing and Bonding For Home, Farm, Office and Marine Automotive, Includes 2 Nozzles, Package Quantity 1



Weight: .114 kgs (.25 lbs)





COL

AX00.070.50

Simultaneously mix and dispense 2-part adhesives. Holds 50 ml cartridges.

Epoxy gun

Weight:

.179 kgs (.394 lbs)

COD

AX00.100.700

Titebond® 100% Silicone Sealant is a versatile formula that is ideal for both interior and exterior applications. It is a RTV industrial sealant and offers excellent adhesion to many common construction materials, including vinyl, aluminum, glass and painted surfaces. It also provides a strong, flexible seal that offers excellent water-resistance.

When fully cured, Titebond 100% Silicone Sealant can withstand extreme temperature conditions. The 100% antimicrobial formula will not crack or become brittle with age and resists fading or yellowing. It also extrudes easily in lower temperatures and dries quickly.

Clear Silicone

Weight: .365 kgs (.803 lbs)



4



OD.

AX00.080.505

- Superior alternative to steel wool, wire brushes, sandpaper, and other non-woven products for cleaning or finishing tasks.
- Very fine grade aluminum oxide abrasive cleans, finishes, grains, denibs, and defuzzes.
- Pad resists tearing, splintering, shredding, loading and will never rust, providing a long, useful life.
- Can be folded, stacked, or rolled for effective cleaning or conditioning on flat, irregular, or contoured surfaces.

Scotch Brite

Weight: 116 kgs (.256 lbs)

COD.

AX00.080.515

Our strongest cleaner, ideal for removing hard to clean substances from all stainless steel products. Used most commonly after installation and prior to applying polish and passivator.

Degreaser

Weight: 108 kgs (.238 lbs)





COD.

AX00.080.510

Ideal for normal cleaning and maintenance of all stainless steel products. Use prior to applying passivator.

Cleaner/Polish

Weight: 108 kgs (.238 lbs)



AX00.080.517

Essential for maximum corrosion resistance of all stainless steel products. Use after applying degreaser and polish.

Polish/Passivator

Weight: 108 kgs (.238 lbs)

COD

AX00.070.640 212 Metal Post Drill Kit

Includes:

5/32" Metal drill bit 29/64" Metal drill bit 3/16" Open end wrench

Weight: .073 kgs (.16 lbs)





COD

AX00.070.620 262 Wood Post Drill Kit

Includes:

5/32" Wood drill bit 29/64" Wood drill bit 1/4" Wood drill bit 3/16" Allen wrench

Weight: .082 kgs (.18 lbs)

COD

AX00.070.635 102 Metal Post Drill Kit

Includes:

29/64" Metal drill bit 1/4" Metal drill bit 7/16" Open end wrench **Weight:** .073 kgs (.16 lbs)



COD.

AX00.070.630 102 Wood Post Drill Kit

Includes:

29/64" Wood drill bit 1/4" Wood drill bit 7/16" Open end wrench **Weight:** .073 kgs (.16 lbs)

COD.

AX00.070.645 401 Metal Post Drill Kit

Includes:

5/32" Metal drill bit

5/16" Metal drill bit and tap(24 thread)

3/8" Open end wrench

Weight: .082 kgs (.18 lbs)



2000

COD

AX00.070.627

601 Wood Post Drill Kit

Includes:

5/32" Wood drill bit 9/32" Wood drill bit 29/64" Wood drill bit 1/4" Wood drill bit 3/16" Allen wrench

Weight: .091 kgs (.2 lbs)

COD.

AX00.070.650 500M Metal Post Drill Kit

Includes:

5/32" Metal drill bit

5/16" Metal drill bit and tap(24 thread)

3/8" Open end wrench Weight: .073 kgs (.16 lbs)





COD.

AX00.070.625 300,500 Wood Post Drill Kit

Includes:

5/32" Wood drill bit 7/32" Wood drill bit 3/8" Open end wrench

Weight: .068 kgs (.15 lbs)

COD

AX00.070.610 Bulk Cable & Fittings Drill Bit

Includes:

5/16" Kobalt drill bit

Weight: .023 kgs (.05 lbs)



COI

AX00.070.605 AX00.070.606 AX00.070.608 M5mm drill & tap set (handrail) M6mm drill & tap set (bar holders) M8mm drill & tap set (glass clamps)

Drill & tap set

Weight: .045 kgs (.1 lbs)

COD

AX00.070.651

3/8" punch for precision drilling.

Center punch

Weight: .068 kgs (.15 lbs)







COD. S-9403

Sure tite fastener for wood newel posts.

Sure Tite Newel Fastener

Weight: .249 kgs (.55 lbs)

S-9401

Key Lock Newel Fastener

Key Lock Newel Fastener

Weight: .301 kgs (.66 lbs)

COD

AX00.070.652

Tap Magic Pro Tap 16 oz spout top.

Cutting fluid

Weight: .454 kgs (1 lbs)





AX.00.110.710

Composite shims for proper post leveling/mounting.

Shims (12 pack)

Weight: .331 kgs (.73 lbs)



COD

HFC18.C9CUTTER

Ideal for cutting our stainless steel cable or any cable up to 1/4" thickness.

Cable cutter - large

Weight:

.86 kgs (1.89 lbs)



COD

HFC18.CUTTER

Ideal for cutting our stainless steel cable or any cable up to 1/8" thickness

Cable cutter - small

Weight:

.344 kgs (.74 lbs)



COL

HFC18.WHEEL

Make close cuts on cable with clean finished ends.

Cable cut-off wheel

Weight:

.085 kgs (.187 lbs)

COD.

HFC18.PLIER

Cable gripping pliers for proper tensioning.

Cable gripping pliers

Weight:

.748 kgs (1.65 lbs)



COL

HFC18.TENSION GAUGE

Accurately measure tension on cable railing.

Tension Gauge

Weight:

.241 kgs (.53 lbs)

COD

HFC18.TUBE

Insert tube for use with 1/8" cable and wood posts.

Insert Tube

Weight:

.005 kgs (.01 lbs)



COD

HFC18.KEY

Release key for all push lock fitting cable kits.



Cable Release Key

Weight:

.005 kgs (.01lbs)

COD

HFC18.DRIVER

Hanger bolt driver for use with our **HFC18.500** cable kit

Hanger bolt driver

Weight:

.204 kgs (.45 lbs)



COD

AX00.060.550

Allen wrench for use with our middle tensioning body (AX00.050.235.B.SP).



Allen wrench

Weight:

.005 kgs (.01lbs)



AX00.070.212

Accurately bend 12 mm round infill tubing for curved applications.

Infill tube bender

Weight:

.301 kgs (6.35 lbs)

COD.

AX00.060.400

Our two stage hydraulic swaging compression tool allows for up to 16 tons of pressure to be applied to cable fittings. Full die set included for 3, 4, 5, 6 mm.

Hydraulic Crimper

Weight:

4.2 kgs (9.25 lbs)



AX00.060.415

AX00.060.420

Die set for 3/4mm Die set for 5/6mm

Die set

Weight:

.045 kgs (.1 lbs)



AX00.070.520

Threaded pop rivet installation gun. Interchangeable mandrel/nosepieces for blind rivet nuts sizes: M3,M4,M5,M6,M8

Pop rivet gun

Weight:

2.52 kgs (5.55 lbs)



AX30.070.530

Spanner wrench for tightening round standoffs.

Spanner wrench - round

Weight:

.187 kgs (.412 lbs)



AX40.022.270.A.SP

Spanner wrench for tightening square standoffs.

Spanner wrench - square

Weight:

.295 kgs (.65 lbs)



AX40.070.562

This multi-function tool allows you to precisely hammer wedges into place and roll the rubber strip into place on U channel.

Wedge tool

Weight:

.68 kgs (1.5 lbs)





© 2017 AXIA STAIR & RAILING SYSTEMS

All images are copyrighted and cannot be reproduced without expressed written consent. Unauthorized use is prohibited and punishable by law.

Catalog Edition 001-A



Houston 16684 Air Center Blvd. Houston, Texas 77032

Phone 281.209.0000 Fax 281.209.0067

Austin 8606 Wall St. Suite 200 Austin, Texas

Phone 512.973.8373 Fax 512.973.9919

San Antonio Phone 210.521.4808 Fax 210.521.7618

Dallas 2520 N Great Southwest Pkwy. Suite 104

Grand Prairie, Texas 75050

Phone 817.701.2006 Fax 817.701.2020

www.ironwoodusa.com

